

TAPIFLEX EXCELLENCE 65



Tapiflex Excellence 65 - Comfort and colour harmony.

With a 0.7 mm PVC wear layer, Tapiflex Excellence 65 offers remarkable resistance to indentation, abrasion and tearing. A high density foam backing with closed cells reduce impact noise and soften every step to provide unrivaled sound reduction and shock absorbency.

Available in 100 colour options and 13 designs Tapiflex Excellence 65 has matching accessories and is coordinated with the Tapiflex TX Stairs range. This is an ideal solution for heavy traffic areas in education, healthcare, aged care, commerce and leisure.


The surface benefits from TOPCLEAN XP PUR reinforcement which means no wax and no polish for life and easy low-cost maintenance.

Most patterns and colours are also available in compact version with Acczent Excellence 80 (please refer to table of content).



Technical data		Tapiflex Excellence 65 sheet	Tapiflex Excellence 65 tiles
Classification	EN 685 commercial industrial UPEC Classification Acoustic efficiency NF UPEC.A certificate number (Ref NF189)	Classes: 34 U4 P3 E2/3 C2 19dB TBA	Classes: 34 U4 P3 E2/3 C2 19dB TBA
Total thickness	EN 428	3.45 mm	
Wear layer thickness	EN 429	0.65 mm	
Total weight	EN 430	3 295 g/m ²	3 465 g/m ²
Polyurethane reinforcement (PUR)		TOPCLEAN XP	
Abrasion group	EN 660-1	Group T: ≤ 0.08 mm	
Residual indentation	EN 433	0.15 mm	
Underfoot comfort	EN 433	≥ 0.40 mm	
Furniture leg	EN 424	No damage	
Castor wheel test	EN 425	No damage	
Dimensional stability	EN 434	≤ 0.10 %	
Curl resultant to heat	EN 434	≤ 8 mm	≤ 2 mm
Reaction to fire	EN 13501-1 ASTM E648	B _n s1 glued over any A2 _n or A1 _n substrate (concrete) C _n s1 glued over any derivative wood substrate Class 1	
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3	
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R _t > 10 ¹⁰ ohms	
Impact sound reduction	EN ISO 140-8 EN ISO 717/2	ΔL _{v,w} = 19 dB	
Acoustic improvement	NF S 31-074	L _{n,e,w} = 61 dB	
Light fastness	EN ISO 105-B02	≥ 6/8	
Chemical resistance	EN 423	High resistance	
Resistance to bacteria	NF EN ISO 846	Sanitized - Grade 0 - high fungi effect	
Thermal resistance Underfloor heating	EN 12524	0.05 m ² K/W Suitable	
Colours		Wood: 19 Zebrano: 2 Esquisse: 16 Steel: 1 Fragmentation: 3 Concrete: 4 Ceramic: 3 Sisal: 3 Uni: 14 Matrix ² : 12 Matrix ² Phospho: 1 Flocons: 11 Led: 5 Pixel: 6	Esquisse: 5 Flocons: 5
Form of delivery	EN 426 EN 427	Rolls: 23 lm x 2 m	Tiles: 50 cm x 50 cm

The above information is subject to modifications for the benefit of further improvement (01/2010).
For more detailed technical information, please contact Tarkett.

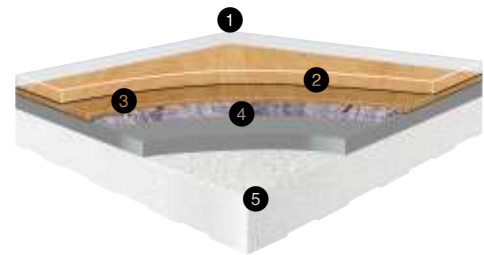

- 1 TOPCLEAN XP PUR reinforcement: resistance to abrasion and easy maintenance (no wax-no polish for life!)
- 2 Pure PVC transparent wear-layer: gives very high wear resistance
- 3 Printed design layer
- 4 Glass fibre non-woven reinforcement + polymeric coating + solid homogeneous calendered sheet for high dimensional stability, and excellent resistance to indentation and tearing
- 5 High-density closed-cell foam backing for sound reduction and comfort underfoot

Tapiflex Excellence 65 Wood pages 120-121

Tapiflex Excellence 65 Esquisse pages 122-123

Tapiflex Excellence 65 Concrete / Steel / Fragmentation pages 124-125

Tapiflex Excellence 65 Sisal/Zebrano/Ceramic pages 126-127

Tapiflex Excellence 65 Uni pages 128-129

Tapiflex Excellence 65 Matrix²/Matrix² Phospho pages 130-131

Tapiflex Excellence 65 Flocons pages 132-133



Tapiflex Excellence 65 Pixel / Led pages 134-135

Tapiflex Excellence 65

Wood

- ┌ *Wide colour ranges and versatile designs*
- ┌ *High sound reduction (19 dB) with unique indentation properties (0.15 mm)*
- ┌ *New TopClean XP PUR: easy, low-cost maintenance*
- ┌ *Excellent resistance to scratches and abrasion*
- ┌ *Excellent resistance to scuffing, soiling and staining*
- ┌ *Glass fibre non-woven reinforcement: unique dimensional stability*
- ┌ *Compact version also available (see Acczent Excellence 80 on pages 84 and 85)*



CE	EN 14041:2004	Manufactured by: Tarkett SAS 08200 Sedan FRANCE
	 	EN 651 Tapiflex Excellence 65



According to European Classification EN 685



Bamboo

Washed Oak



Grey

3588 016



White

3588 017



Natural

3588 018

Bamboo



3587 005

Merbau



3588 022

Brushed Oak



Dark

3588 025



Medium

3588 026



Light

3588 027


Ipe



Ipe

3588 021

Cabreuva



Cabreuva

3588 011

RoseWood



3588 012

Ship Deck



3588 023

Wenge




3588 024

Doussie



3588 020

Oak



3588 001

Maple



3588 005

Beech



Light


3588 002



Medium

3588 003

American Oak



3588 007

Tapiflex Excellence 65


Esquisse

- └ *Wide colour ranges and versatile designs*
- └ *High sound reduction (19 dB) with unique indentation properties (0.15 mm)*
- └ *New TopClean XP PUR: easy, low-cost maintenance*
- └ *Excellent resistance to scratches and abrasion*
- └ *Excellent resistance to scuffing, soiling and staining*
- └ *Glass fibre non-woven reinforcement: unique dimensional stability*
- └ *Tiles available in some colours*
- └ *Compact version also available (see Acczent Excellence 80 on pages 86 and 87)*






Medium green

 3586 001




Dark green

 3586 002




Light blue

 3586 004




Light purple

 3586 005




Dark red

 3586 007




Medium red

 3586 008




Orange

 3586 009





Yellow

 3586 010




Medium beige


 3586 011

 3571 011




Grey beige


 3586 012

 3571 012




Light grey


 3586 013

 3571 013




Medium grey


 3586 014

 3571 014




Dark grey

 3586 015

 3571 015





Night blue

 3586 016




Light chocolate

 3586 017



Burgundy






 3586 018

Tapiflex Excellence 65

Concrete/Steel/Fragmentation

- └ *Wide colour ranges and versatile designs*
- └ *High sound reduction (19 dB) with unique*
- └ *Indentation properties (0.15 mm)*
- └ *New TopClean XP PUR: easy, low-cost maintenance*
- └ *Excellent resistance to scratches and abrasion*
- └ *Excellent resistance to scuffing, soiling and staining*
- └ *Glass fibre non-woven reinforcement:
unique dimensional stability*
- └ *Compact version also available
(see Acczent Excellence 80 on pages 88 and 89)*



CE	EN 14041:2004	Manufactured by:			
	 	Tarkett SAS 08200 Sedan FRANCE EN 651 Tapiflex Excellence 65			

Concrete



Grey

3587 001



Chalk

3587 002



Grey beige


3587 003



Brown

3587 006


Steel



Grey

3587 501

Fragmentation



Grey

3587 101



Beige

3587 102




Brown

3587 103

Tapiflex Excellence 65

Sisal/Zebrano/Ceramic

- └ *Wide colour ranges and versatile designs*
- └ *High sound reduction (19 dB) with unique*
- └ *Indentation properties (0.15 mm)*
- └ *New TopClean XP PUR: easy, low-cost maintenance*
- └ *Excellent resistance to scratches and abrasion*
- └ *Excellent resistance to scuffing, soiling and staining*
- └ *Glass fibre non-woven reinforcement:
unique dimensional stability*
- └ *Compact version also available
(see Acczent Excellence 80 on pages 90 and 91)*

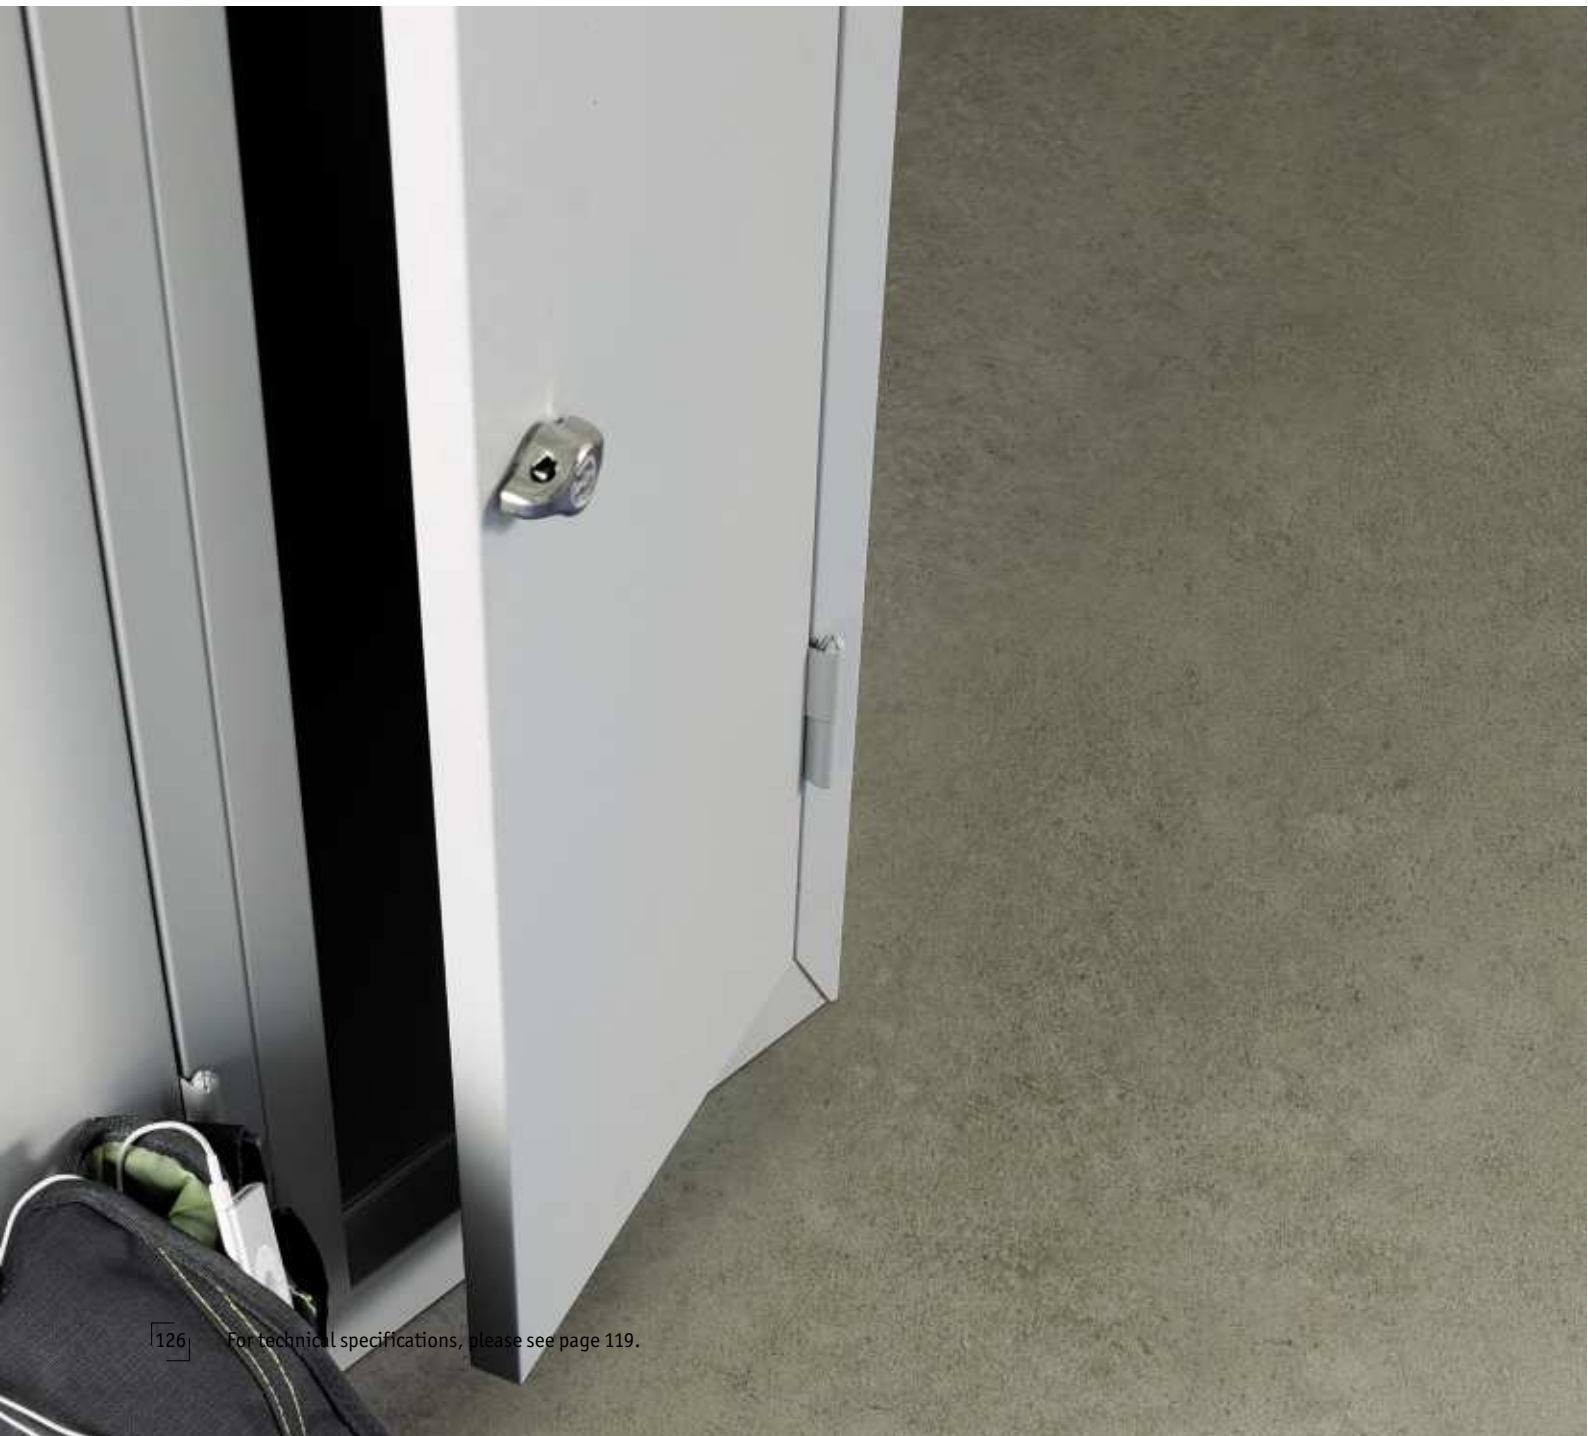

	EN 14041:2004	Manufactured by:
		Tarkett SAS
		08200 Sedan
		FRANCE
		EN 651
		Tapiflex Excellence 65



Coco sisal



Grey

3589 001



Beige

3589 002



Brown

3589 003

Zebrano



Black & White

3587 401



Natural

3587 402

Ceramic



Dark grey

3587 301



Chocolate

3587 302



Grey beige

3587 303

Tapiflex Excellence 65

Uni

- ┌ *Wide colour ranges and versatile designs*
- ┌ *High sound reduction (19 dB) with unique indentation properties (0.15 mm)*
- ┌ *New TopClean XP PUR: easy, low-cost maintenance*
- ┌ *Excellent resistance to scratches and abrasion*
- ┌ *Excellent resistance to scuffing, soiling and staining*
- ┌ *Glass fibre non-woven reinforcement: unique dimensional stability*



CE	EN 14041:2004	Manufactured by: Tarkett SAS 08200 Sedan FRANCE
		EN 651 Tapiflex Excellence 65

According to European Classification EN 685

Santiged

VINYL



Purple

3584023



Dark green

3584024



Light green

3584006



Gold

3584005



Medium orange

3584011




Dark red

3584010



Magenta

3584013




White

3584018



Black

3584015




Dark grey

3584016



Medium grey

3584017



Warm grey

3584025



Chocolat

3584026




Grege

3584027


Tapiflex Excellence 65

Matrix²/Matrix² Phospho

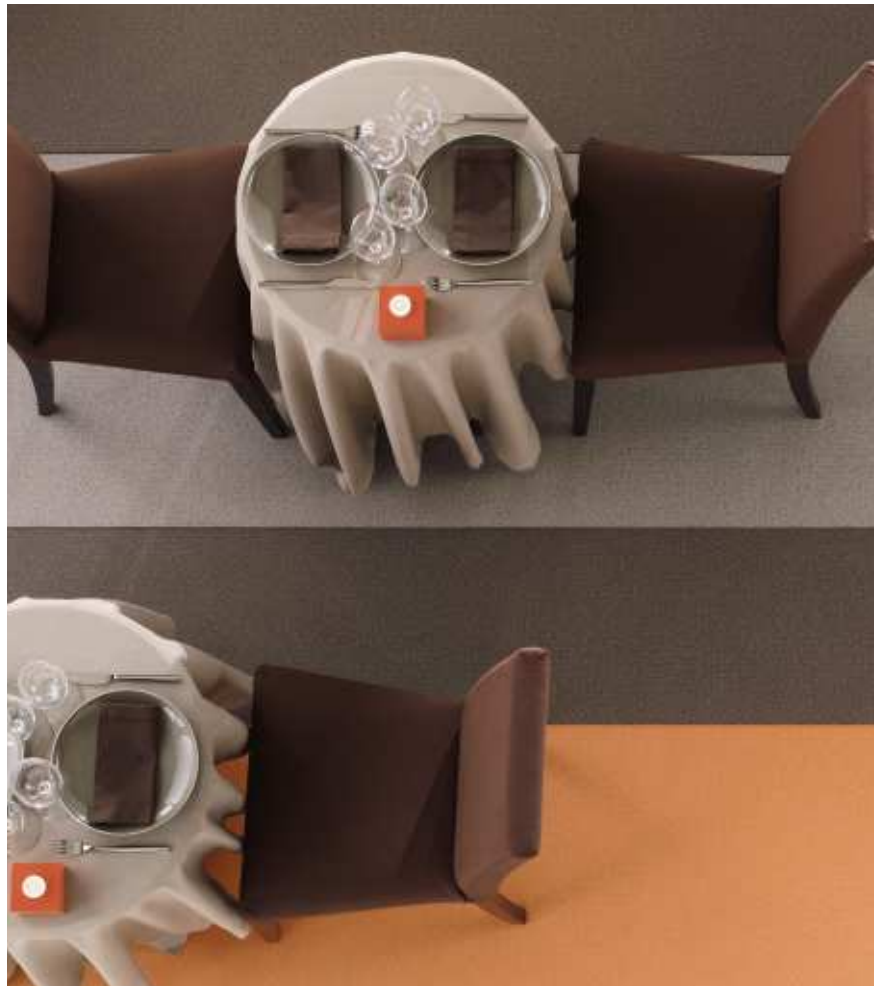

- └ *Wide colour ranges and versatile designs*
- └ *High sound reduction (19 dB) with unique indentation properties (0.15 mm)*
- └ *New TopClean XP PUR: easy, low-cost maintenance*
- └ *Excellent resistance to scratches and abrasion*
- └ *Excellent resistance to scuffing, soiling and staining*
- └ *Glass fibre non-woven reinforcement: unique dimensional stability*

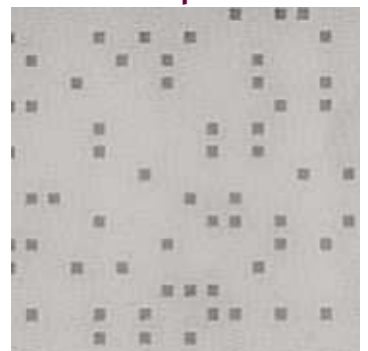


Matrix² Phospho



3584101

Phospho


Matrix²

		Manufactured by: Tarkett SAS 08200 Sedan FRANCE
		EN 651 Tapiflex Excellence 65




Dark brown

3586145

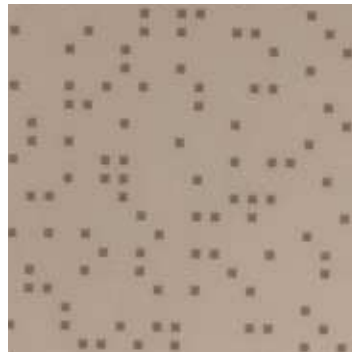

Light brown

3586146

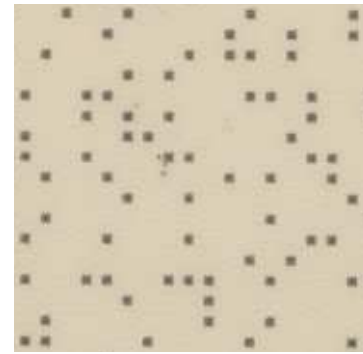


Grey beige

3586134




Dark grey

3586135

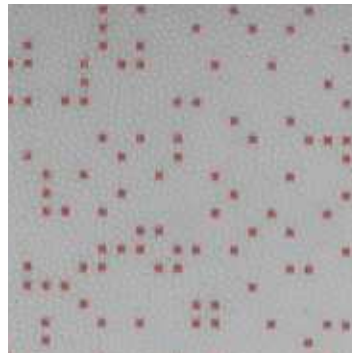


Grey

3586147

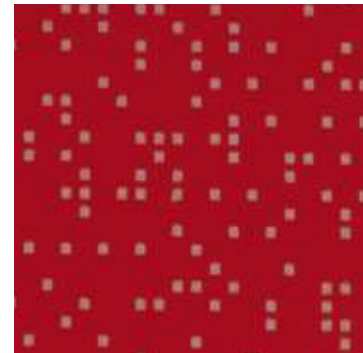


Red

3586148

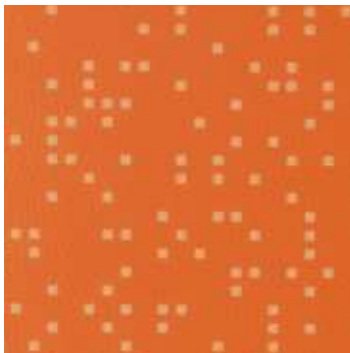


Orange

3586123

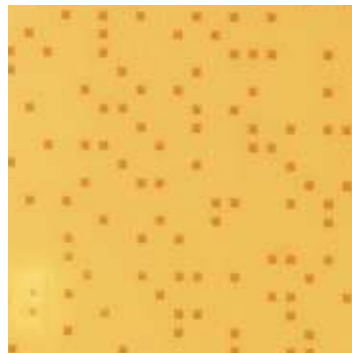

Gold

3586122

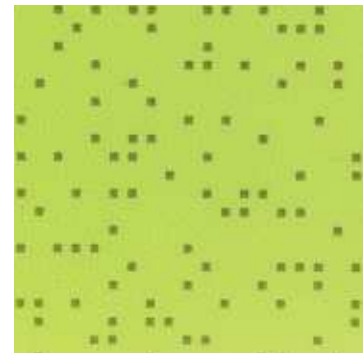


Light green

3586132




Dark green

3586133

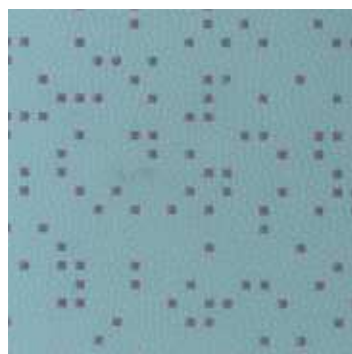

Sky blue

3586149

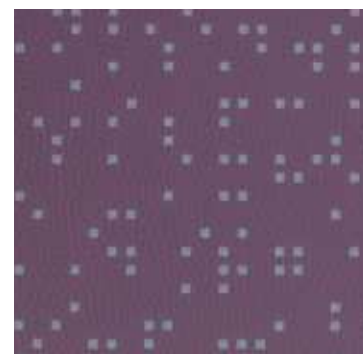

Purple


3586150

Tapiflex Excellence 65


Flocons


- └ *Wide colour ranges and versatile designs*
- └ *High sound reduction (19 dB) with unique*
- └ *Indentation properties (0.15 mm)*
- └ *New TopClean XP PUR: easy, low-cost maintenance*
- └ *Excellent resistance to scratches and abrasion*
- └ *Excellent resistance to scuffing, soiling and staining*
- └ *Glass fibre non-woven reinforcement:
unique dimensional stability*
- └ *Tiles available in some colours*






White


 3586 201

 3571 201




Grege

 3586 202

 3571 202





Dark Grey


 3586 203




Medium Grey


 3586 204


 3571 204




Grey Blue


 3586 205

 3571 205

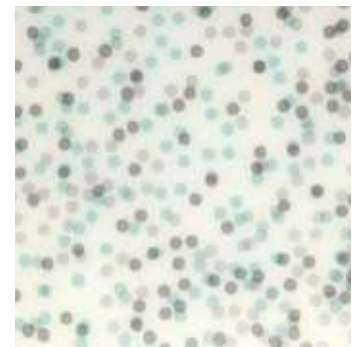



White Blue

 3586 206




Blue

 3586 207





White Green


 3586 208




Green


 3586 209

 3571 209




Yellow

 3586 210



Orange

 3586 211


Tapiflex Excellence 65


Pixel/Led

- └ *Wide colour ranges and versatile designs*
- └ *High sound reduction (19 dB) with unique*
- └ *Indentation properties (0.15 mm)*
- └ *New TopClean XP PUR: easy, low-cost maintenance*
- └ *Excellent resistance to scratches and abrasion*
- └ *Excellent resistance to scuffing, soiling and staining*
- └ *Glass fibre non-woven reinforcement:
unique dimensional stability*



Pixel

CE	EN 14041:2004	Manufactured by:
		Tarkett SAS
		08200 Sedan
		FRANCE
		EN 651
		Tapiflex Excellence 65

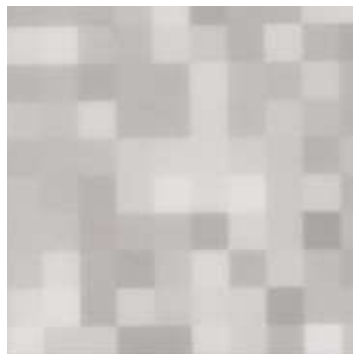

White

3587 201



Grey

3587 202



Black

3587 203




Yellow

3587 204



Green

3587 205

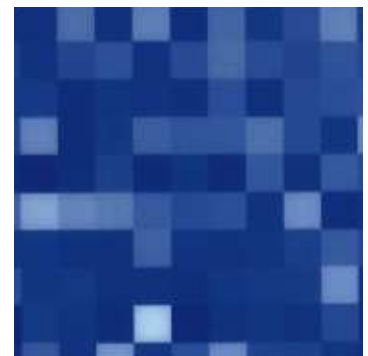

Blue


3587 206

Led




Red

3585 001

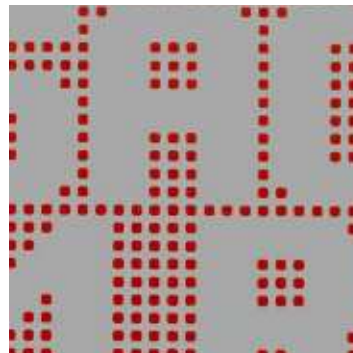

Grey / Red

3585 002

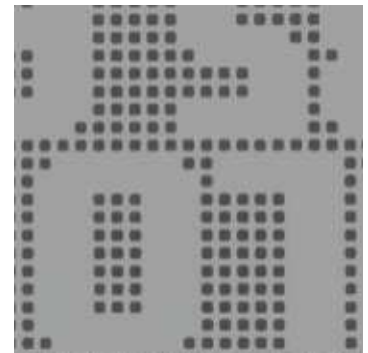


Light grey

3585 003



Dark grey

3585 004

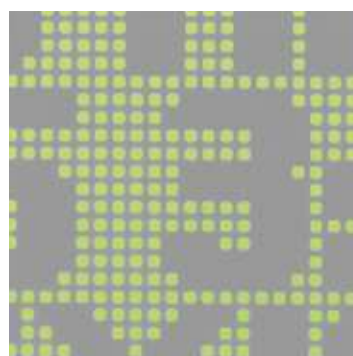

Phospho

3585 005