

Heavy Traffic – Compact Heterogeneous

CENTURY



Century Croma - The style and strength of minerals.

With a 1.60 mm wear, Century Croma compact heterogeneous vinyl flooring offers exceptional durability and wear resistance. A strong range of classic and contemporary designs, inspired by minerals and using 3D pattern, make Century Croma an ideal choice for very heavy traffic areas in sectors such as healthcare, education, retail and industry.



The surface benefits from TOPCLEAN XP PUR reinforcement which means no wax and no polish for life and easy low-cost maintenance.


Technical data		Century Croma
Classification	EN 685 commercial industrial UPEC Classification NF UPEC certificate number (Ref NF189)	Classes: 34 43 U4 P3 E2/3 C2 305-051.1
Polyurethane reinforcement (PUR)		TOPCLEAN XP
Total thickness	EN 428	2.90 mm
Wear layer thickness	EN 429	1.60 mm
Total weight	EN 430	3 800 g/m ²
Abrasion group	EN 660-1	Group T: ≤ 0.08 mm
Static indentation	EN 433	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor wheel test	EN 425	No damage
Dimensional stability	EN 434	≤ 0.10 %
Curl resultant to heat	EN 434	≤ 8 mm
Reaction to fire	EN 13501-1 ASTM E648	B _{fl} s1 glued over A2 _{fl} or A1 _{fl} substrate (concrete) Class 1
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R _t > 10 ¹⁰ ohms
Impact sound reduction	NF EN ISO 140-8 NF EN ISO 717/2	ΔL _w = 5 dB
Acoustic improvement	NF S 31-074	L _{n, e, w} = 74 dB
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN 423	High resistance
Anti fungi treatment Resistance to microb and bacteria	EN ISO 846	Sanitized Grade 1 High fungi effect
Thermal resistance Underfloor heating	DIN 52612	0.03 m ² K/W Suitable
Colours		10
Form of delivery	EN 426	Rolls: 23 lm x 2 m

The above information is subject to modifications for the benefit of further improvement (01/2010).
For more detailed technical information, please contact Tarkett.

Century Croma

- └ *Unique inlaid 3D designs*
- └ *New TopClean XP PUR:
easy, low-cost maintenance*
- └ *Excellent resistance to scratches
and abrasion*
- └ *Excellent resistance to scuffing,
soiling and staining*
- └ *Glass fibre non-woven reinforcement:
unique dimensional stability*



CE	EN 14041:2004	Manufactured by:
	 DS	Tarkett SAS 08200 Sedan FRANCE
		EN 649 Century Croma



According to European
Classification EN 685



3734 010



3734 006



3734 005



3734 001



3734 002




3734 003



3734 004



3734 009

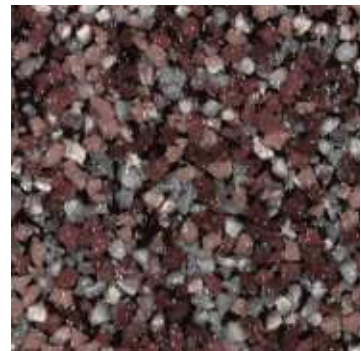

3734 008



3734 007